



FRONT VIEW

Pin #	Assignment
1	Top
2	Top sense
3	Bottom sense
4	Bottom
5	Left
6	Left sense
7	Right sense
8	Right

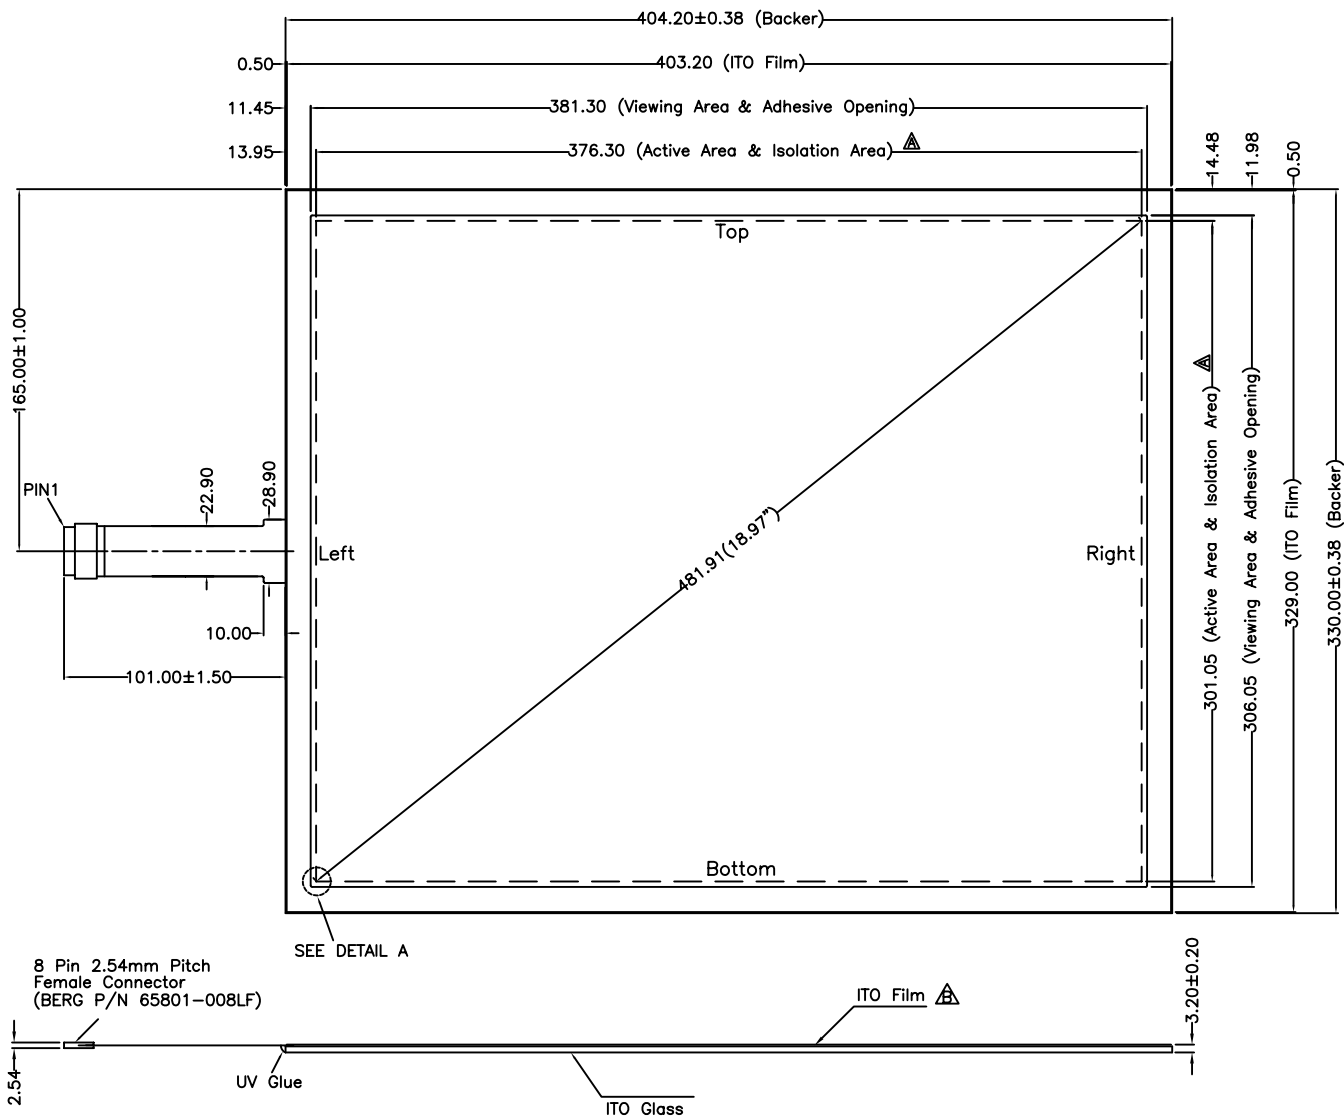

8 Pin 2.54mm Pitch Female Connector (BERG P/N 65801-008LF)

- NOTES:
1. ITO GLASS THICKNESS : 2.80mm
 2. OVERALL THICKNESS : 3.20±0.20mm
 3. CONNECTOR AND PINOUT AS INDICATED
 4. FRONT SURFACE : ANTI-GLARE HARDCOAT
 5. LAYER TO LAYER ASSEMBLY TOLERANCE : ±0.50mm
 6. TAIL TYPE : IMMERSION GOLD PLATED FPC WITH BERG CONNECTOR
 7. CONNECTOR : BERG P/N 65801-008LF
 8. OTHER SPEC : SEE APPROVAL SHEET



NO.	DATE	DESCRIPTION	CHK
B	MAR 20, 2008	MODIFY ITO FILM	ALEX
A	JUL 31, 2007	MODIFY ISOLATION AREA & ISOLATION MATERIAL	ALEX
REVISION			
CHIEF OF DESIGN		APPROVED	Alex
ENGINEER		PROJECT MANAGER	
DRAWN BY	Denise	DATE	APR. 22, 2009
SHT	1 OF 1	REV.	B

TOLERANCES UNLESS SPECIFIED	
.X	± 0.50
.XX	± 0.50
.XXX	± 0.30
ANGULAR	.

MODEL NAME : 9548
DWG NO : 9548-2-011
SCALE: 1:1 UNIT: mm

Apex Material Technology Corp.