



TOUCH SIDE VIEW

Pin#	Assignment
1	Top(Y+)
2	Top sense(Y+)
3	Bottom sense(Y-)
4	Bottom(Y-)
5	Left(X-)
6	Left sense(X-)
7	Right sense(X+)
8	Right(X+)

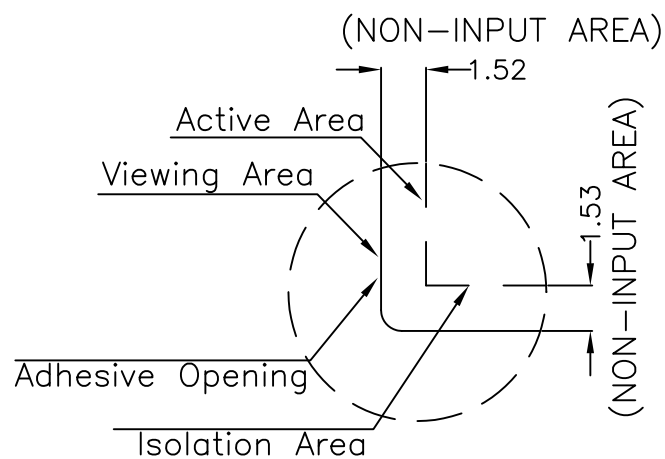

DETAIL A

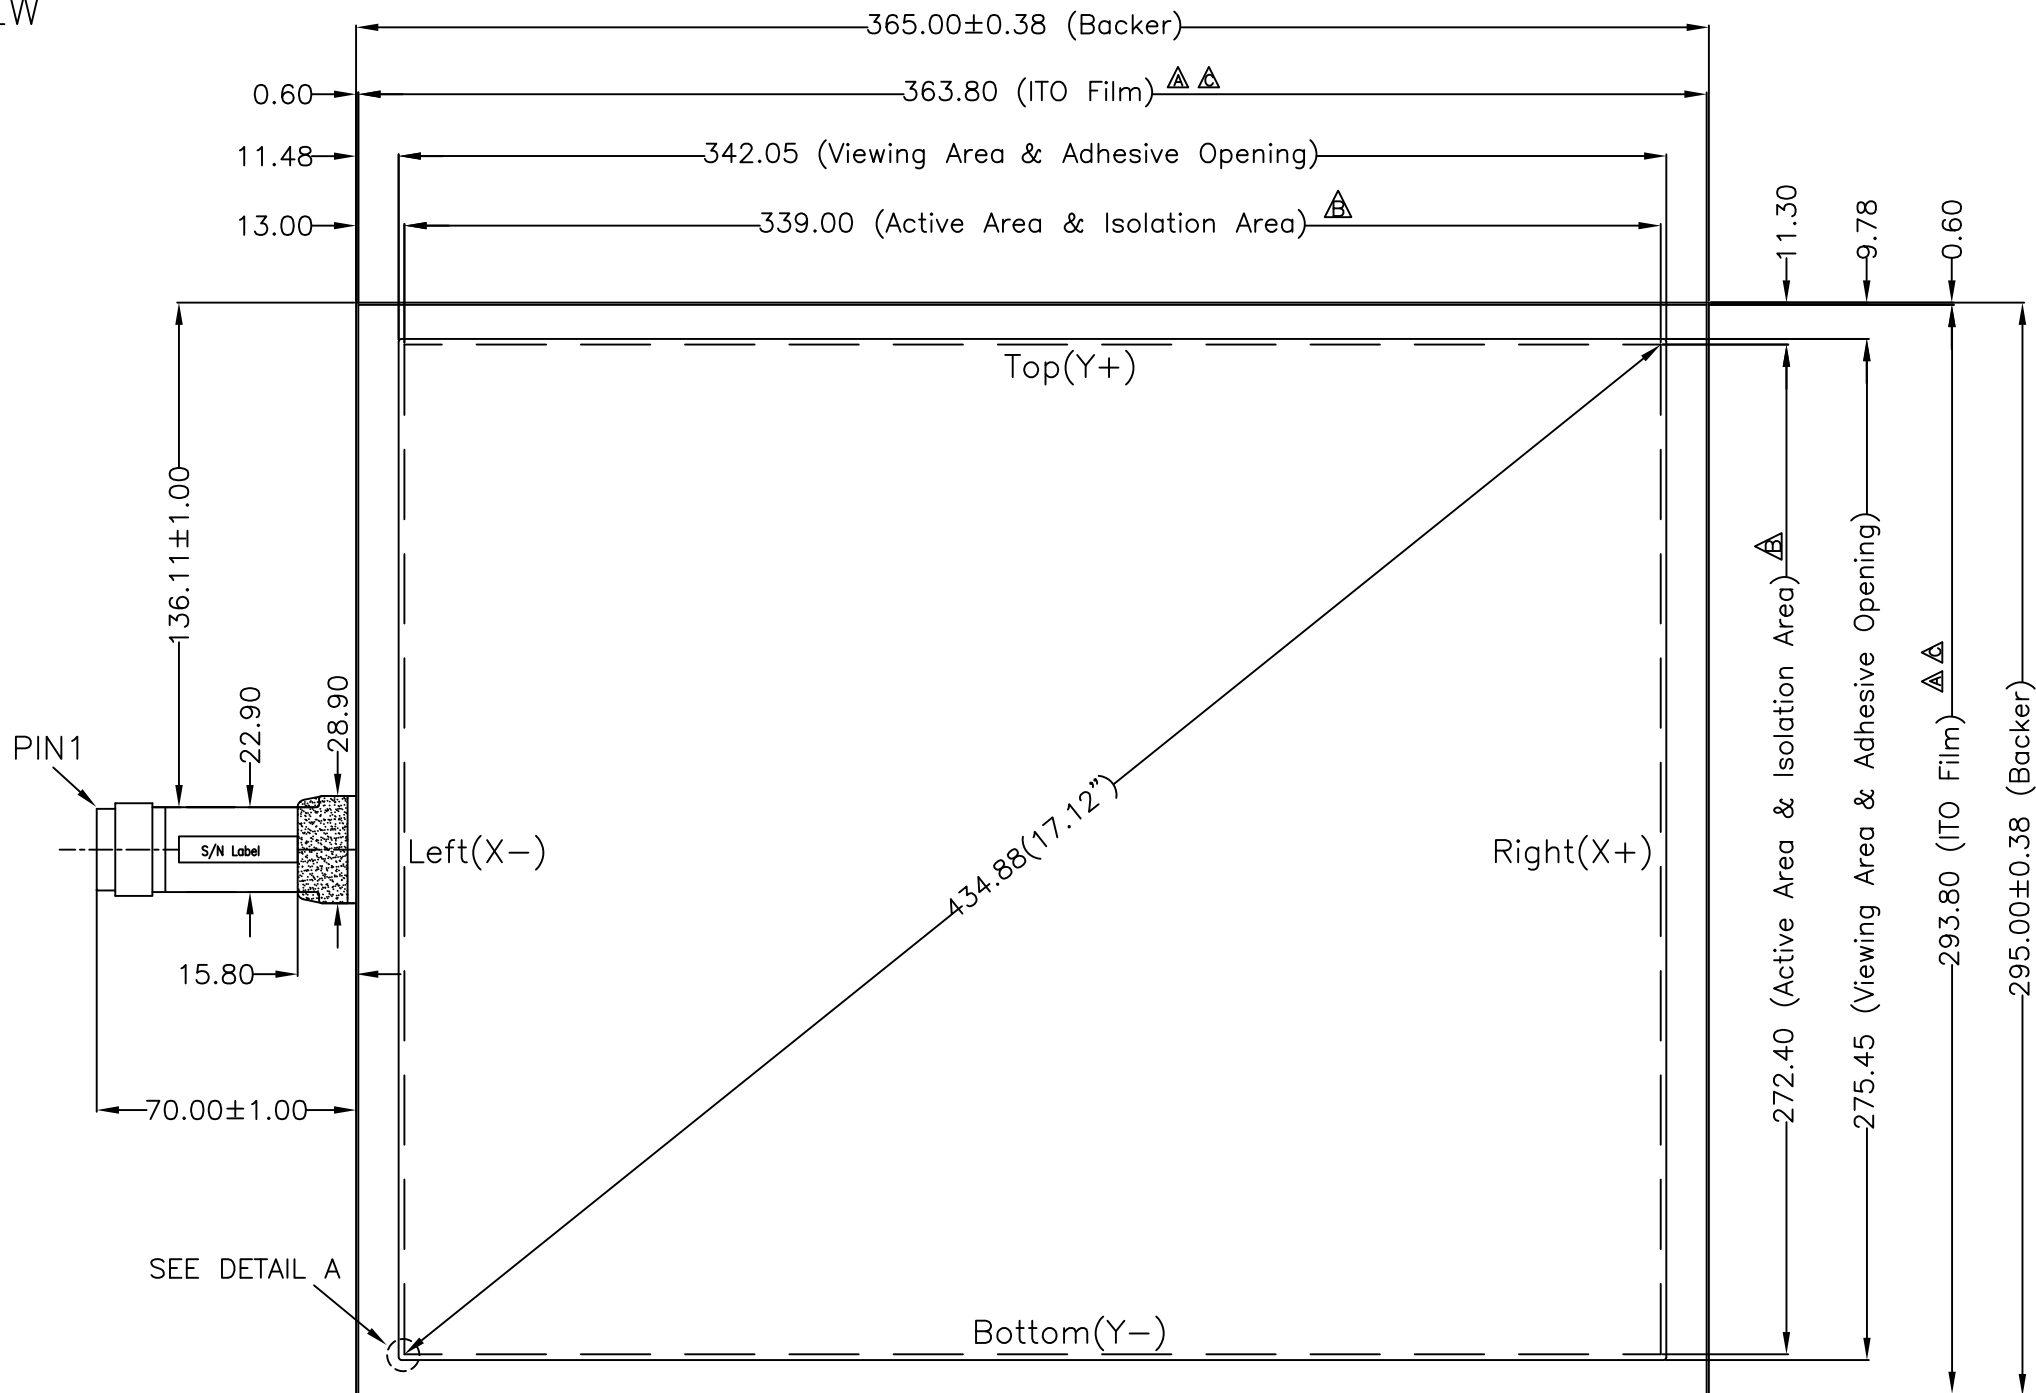

8 Pin 2.54mm Pitch
Female Connector
(BERG P/N 65801-008LF)



NOTES:

1. ITO GLASS THICKNESS : 2.80mm
2. OVERALL THICKNESS : 3.20±0.20mm
3. CONNECTOR AND PINOUT AS INDICATED
4. FRONT SURFACE : ANTI-GLARE HARDCOAT
5. TAIL TYPE : IMMERSION GOLD PLATED FPC WITH BERG CONNECTOR
6. CONNECTOR : BERG P/N 65801-008LF
7. OTHER SPEC : SEE APPROVAL SHEET



C	MAR 12, 2008	ITO PET MODIFY	Alex
B	JUL 31, 2007	ISOLATION AREA & ISOLATION MATERIAL MODIFY	Alex
A	DEC 8, 2006	ITO PET MODIFY	Alex
NO.	DATE	DESCRIPTION	CHK
REVISION			
CHIEF OF DESIGN		APPROVED	Alex
ENGINEER		PROJECT MANAGER	
DRAWN BY	Wagon	DATE	JAN. 07, 2010
SHT 1 OF 1	REV.	C	

Apex Material Technology Corp.

TOLERANCES UNLESS SPECIFIED		MODEL NAME : 9547-02
.X	± 0.50	
.XX	± 0.50	DWG NO :9547-02-3-01
.XXX	± 0.30	SCALE: 1:1 UNIT: mm
ANGULAR	.	