



FRONT VIEW

CONNECTOR PINOUT	
PIN#	DESIGNATION
1	LL
2	UL
3	S
4	LR
5	UR

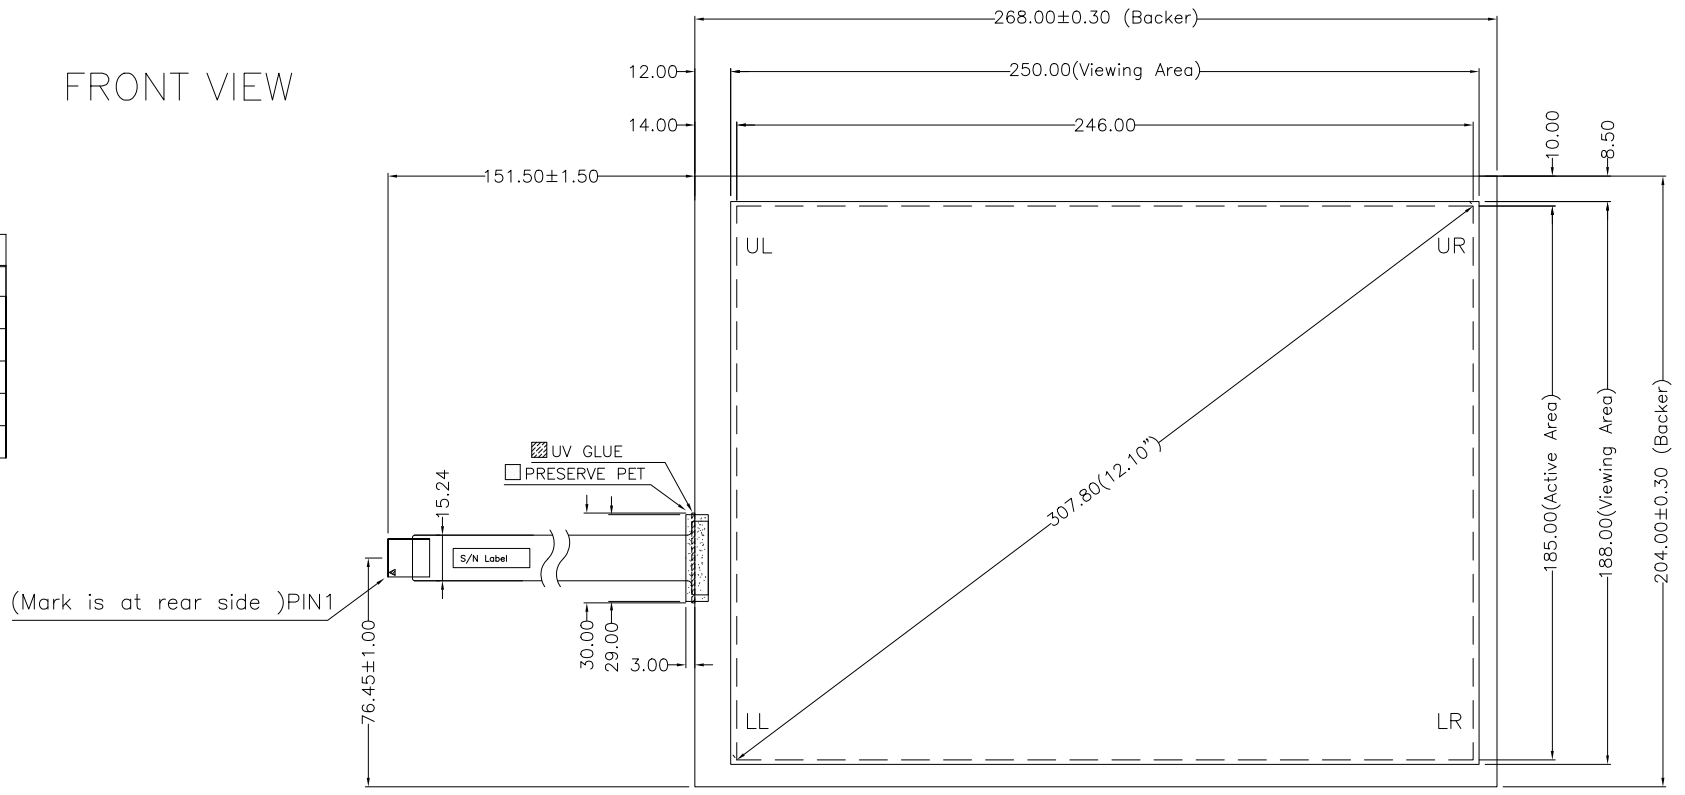

(Mark is at rear side)PIN1

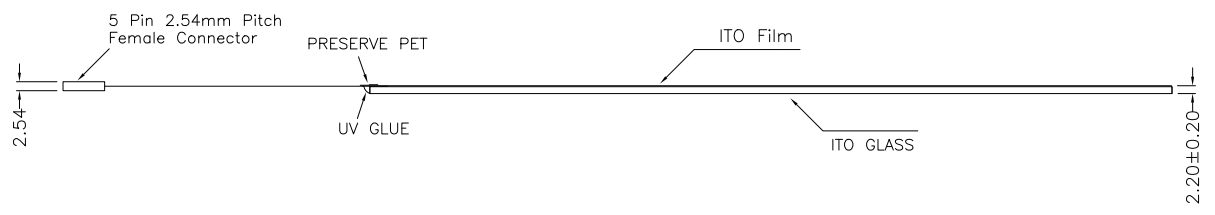

NOTES:

1. ITO GLASS THICKNESS : 1.80mm
2. OVERALL THICKNESS : 2.20±0.20mm
3. CONNECTOR AND PINOUT AS INDICATED
4. FRONT SURFACE : ANTI-GLARE HARDCOAT
5. LAYER TO LAYER ASSEMBLY TOLERANCE: ±0.50mm
6. TAIL TYPE : IMMERSION GOLD PLATED FPC WITH AMP-C CONNECTOR
7. OTHER SPEC : SEE APPROVAL SHEET
8. ANTI-CORROSIVE TYPE



NO.	DATE	DESCRIPTION	CHK
A	Sep. 08, 08	ANTI-CORROSIVE TYPE	Alex
REVISION			
CHIEF OF DESIGN		APPROVED	Alex
ENGINEER		PROJECT MANAGER	
DRAWN BY	William	DATE	Sep. 08, 2008
SHT 1 OF 1		REV.	D

Apex Material Technology Corp.	
TOLERANCES UNLESS SPECIFIED	
.X	± 0.50
.XX	± 0.50
.XXX	± 0.30
ANGULAR	.
PROJECT NAME	:28116
DWG NO	:28116-1-01
SCALE	1:1 UNIT: mm