

15" IP65 Full Frame Stainless Steel Projected Capacitive Touch Panel PC with Intel® Celeron® J1900 Processor



Features

- 15" 1024 x 768 LCD Panel with Projected Capacitive Touch Display
- Intel® Celeron™ J1900 2.0GHz
- Supports Two-finger Touch Control while Wearing Gloves
- Completely Flat Front Panel Design
- Stainless Steel IP65 Waterproof Front Cover
- VESA Mounting

Applications

- CNC Control Panel
- Hospitality and Catering Service Food
- Industry Management System
- Animal Feed Production Facility
- Outdoor Kiosk

→ Packing List

Description
1 x PPC-S152PF
1 x Driver CD
1 x Power Adapter


→ Optional Items

Part No.	Description
ACS-PS-US	Power Cable 3-pin, 180 cm, USA Type
ACS-PS-EU	Power Cable 3-pin, 180 cm, Euro Type
ACS-PS-CN	Power Cable 3-pin, 180 cm, China Type
ACS-100-STD	VESA Table Stand

→ Ordering Information

Part No.	Description
PPC-S152PF-A1	15" Fanless Projected Capacitive Touch Panel PC, IP65 Stainless Steel Full Frame Protection, Intel® Celeron® J1900 2.0GHz Processor

→ Dimensions

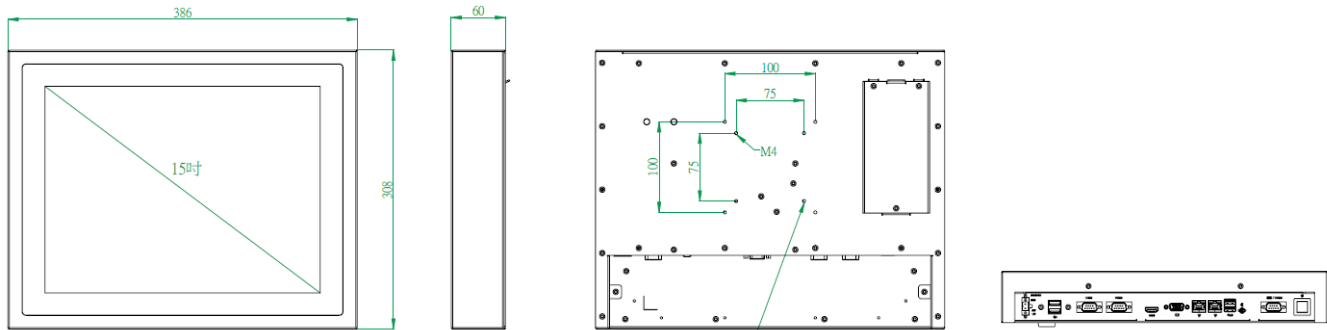

→ Specifications

Model		PPC-S152PF
Processor System	CPU	Intel® Celeron® Processor J1900
	Frequency	Quar-Core up to 2.0 GHz
	L2 Cache	2 MB
	System Chipset	N/A
	BIOS	UEFI
Memory	Technology	DDR3L 1333 MHz SDRAM
	Max. Capacity	8 GB
	Socket	1 (204-pin SO-DIMM)
Display	Panel Size	15" LCD Panel
	Resolution	1024 x 768 (XGA)
	Viewing Angle	80 x 80 (H) x 60 x 80 (V)
	Brightness	300 (cd/m2)
	Color Support	16.7M
	Contrast Ratio	800:1
	Response Time	8 (msec)
	VGA	Up to 1920 x 1200
	HDMI	HDMI 1.4a up to 1920 x 1200
	Dual Display	LCD + VGA, LCD + HDMI
Touchscreen	Touchscreen Type	Projected Capacitive
	Surface Hardness	7 Mohs
	Durability	-
	Transparency	90% (±3%)
I/O Interface	USB	2 USB 3.0, 2 USB 2.0
	Serial Port	3 COM (2 RS-232 ,1 RS-232/422/485)
	Expansion	2 Mini PCIe (1 Full Size and 1 Half-size)
Ethernet	Controller	Dual GbE, 10/100/1000 Mbps (Realtek RTL8111G)
Audio	Chipset	Realtek ALC662 High Definition Audio (HD)
	Connector	Line out
Storage	SATA II	1 Internal 2.5" HDD/SSD
Power	Power Supply Voltage	9-36 V DC input
	Power Connector Type	2-Pin Thermal Block
	Power Consumption (Typical)	1.53 A @ 12 V (18.4 W)
	Power Consumption (Max.)	1.8 A @ 12 V (21.6 W)
	Battery	Lithium 3 V / 210 mA/H
Environment	Operating Temperature	-20~60° C (-4~140° F) w/ 2.5" Extended Temperature SSD
	Storage Temperature	-40~85° C (-40~185° F)
	Humidity	5~95% @ 40° C, Non-condensing
	Vibration	5-500 Hz, 0.026 G ² /Hz, 2.16 Grms, X, Y, Z, 1 hour per axis
	Certification	CE, FCC Class A
General	Front Panel Waterproof	Front Cover IP65, Full Frame stainless steel
	Dimensions (L x W x H)	386 x 308 x 60 mm (15.20" x 12.13" x 2.36")
	Weight	4.93 kg (10.87 lb)
	Operating System	Windows 7/8.1/10, WES7-E/P, WE8S, Ubuntu 14.04